



MODULE 16: NETWORK SECURITY FUNDAMENTALS



Introduction to Networks

Module Objectives

- Module Title: Network Security Fundamentals
- Module Objective: Configure switches and routers with device hardening features to enhance security.

Topic Title	Topic Objective
16.1 Security Threats and Vulnerabilities	Explain why basic security measure are necessary on network devices.
16.2 Network Attacks	Identify security vulnerabilities.
16.3 Network Attack Mitigation	Identify general mitigation techniques.
16.4 Device Security	Configure network devices with device hardening features to mitigate security threats.



16.1 SECURITY THREATS AND VULNERABILITIES



Types of Threats

- Attacks on a network can be devastating and can result in a loss of time and money due to damage, or theft of important information or assets. Intruders can gain access to a network through software vulnerabilities, hardware attacks, or through guessing someone's username and password. Intruders who gain access by modifying software or exploiting software vulnerabilities are called threat actors.
- After the threat actor gains access to the network, four types of threats may arise:
 - Information Theft – Obtaining trade secret documents illegally.
 - Data Loss and Manipulation – Installing virus code to destroy surveillance recordings for certain days.
 - Identity Theft – Pretending to be someone else by using stolen personal information to apply for a credit card.
 - Disruption of Service – Preventing users from accessing a website by sending a large number of link requests in a short period.

Types of Vulnerabilities

- Vulnerability is the degree of weakness in a network or a device. Some degree of vulnerability is inherent in routers, switches, desktops, servers, and even security devices. Typically, the network devices under attack are the endpoints, such as servers and desktop computers.
- There are three primary vulnerabilities or weaknesses:
 - **Technological** Vulnerabilities might include TCP/IP Protocol weaknesses, Operating System Weaknesses, and Network Equipment weaknesses.
 - **Configuration** Vulnerabilities might include unsecured user accounts, system accounts with easily guessed passwords, misconfigured internet services, unsecure default settings, and misconfigured network equipment.
 - **Security Policy** Vulnerabilities might include lack of a written security policy, politics, lack of authentication continuity, logical access controls not applied, software and hardware installation and changes not following policy, and a nonexistent disaster recovery plan.
- All three of these sources of vulnerabilities can leave a network or device open to various attacks, including malicious code attacks and network attacks.

Physical Security

- If network resources can be physically compromised, a threat actor can deny the use of network resources. The four classes of physical threats are as follows:
 - **Hardware threats** - This includes physical damage to servers, routers, switches, cabling plant, and workstations.
 - **Environmental threats** - This includes temperature extremes (too hot or too cold) or humidity extremes (too wet or too dry).
 - **Electrical threats** - This includes voltage spikes, insufficient supply voltage (brownouts), unconditioned power (noise), and total power loss.
 - **Maintenance threats** - This includes poor handling of key electrical components (electrostatic discharge), lack of critical spare parts, poor cabling, and poor labeling.
- A good plan for physical security must be created and implemented to address these issues.



16.2 NETWORK ATTACKS



Types of Malware

- Malware is short for malicious software. It is code or software specifically designed to damage, disrupt, steal, or inflict “bad” or illegitimate action on data, hosts, or networks. The following are types of malware:
 - **Viruses** - A computer virus is a type of malware that propagates by inserting a copy of itself into, and becoming part of, another program. It spreads from one computer to another, leaving infections as it travels.
 - **Worms** - Computer worms are similar to viruses in that they replicate functional copies of themselves and can cause the same type of damage. In contrast to viruses, which require the spreading of an infected host file, worms are standalone software and do not require a host program or human help to propagate.
 - **Trojan Horses** - It is a harmful piece of software that looks legitimate. Unlike viruses and worms, Trojan horses do not reproduce by infecting other files. They self-replicate. Trojan horses must spread through user interaction such as opening an email attachment or downloading and running a file from the internet.

Reconnaissance Attacks

- In addition to malicious code attacks, it is also possible for networks to fall prey to various network attacks. Network attacks can be classified into three major categories:
 - **Reconnaissance attacks** - The discovery and mapping of systems, services, or vulnerabilities.
 - **Access attacks** - The unauthorized manipulation of data, system access, or user privileges.
 - **Denial of service** - The disabling or corruption of networks, systems, or services.
- For reconnaissance attacks, external threat actors can use internet tools, such as the nslookup and whois utilities, to easily determine the IP address space assigned to a given corporation or entity. After the IP address space is determined, a threat actor can then ping the publicly available IP addresses to identify the addresses that are active.

Access Attacks

- Access attacks exploit known vulnerabilities in authentication services, FTP services, and web services to gain entry to web accounts, confidential databases, and other sensitive information.
- Access attacks can be classified into four types:
 - **Password attacks** – Implemented using brute force, trojan horse, and packet sniffers
 - **Trust exploitation** - A threat actor uses unauthorized privileges to gain access to a system, possibly compromising the target.
 - **Port redirection** – A threat actor uses a compromised system as a base for attacks against other targets. For example, a threat actor using SSH (port 22) to connect to a compromised host A. Host A is trusted by host B and, therefore, the threat actor can use Telnet (port 23) to access it.
 - **Man-in-the middle** – The threat actor is positioned in between two legitimate entities in order to read or modify the data that passes between the two parties.

Denial of Service Attacks

- **Denial of service** (DoS) attacks are the most publicized form of attack and among the most difficult to eliminate. However, because of their ease of implementation and potentially significant damage, DoS attacks deserve special attention from security administrators.
- DoS attacks take many forms. Ultimately, they prevent authorized people from using a service by consuming system resources. To help prevent DoS attacks it is important to stay up to date with the latest security updates for operating systems and applications.
- DoS attacks are a major risk because they interrupt communication and cause significant loss of time and money. These attacks are relatively simple to conduct, even by an unskilled threat actor.
- **Distributed Denial of Service** (DDoS) is similar to a DoS attack, but it originates from multiple, coordinated sources. For example, a threat actor builds a network of infected hosts, known as zombies. A network of zombies is called a botnet. The threat actor uses a command and control (CnC) program to instruct the botnet of zombies to carry out a DDoS attack.




16.3 NETWORK ATTACK MITIGATIONS



The Defense-in-Depth Approach

- To mitigate network attacks, you must first secure devices including routers, switches, servers, and hosts. Most organizations employ a defense-in-depth approach (also known as a **layered approach**) to security. This requires a combination of networking devices and services working in tandem.

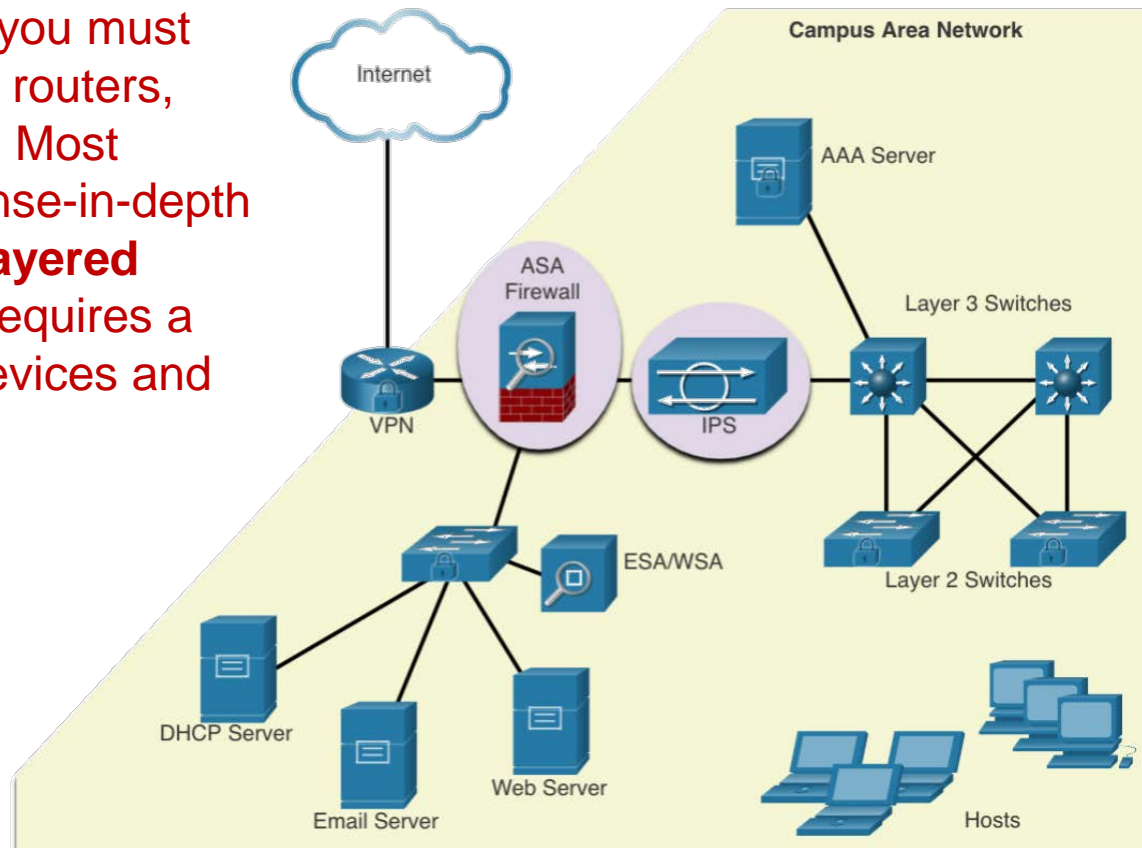

The Defense-in-Depth Approach

- Several security devices and services are implemented to protect an organization's users and assets against TCP/IP threats:
 - **VPN** - A router is used to provide secure VPN services with corporate sites and remote access support for remote users using secure encrypted tunnels.
 - **ASA Firewall** - This dedicated device provides stateful firewall services. It ensures that internal traffic can go out and come back, but external traffic cannot initiate connections to inside hosts.
 - **IPS** - An intrusion prevention system (IPS) monitors incoming and outgoing traffic looking for malware, network attack signatures, and more. If it recognizes a threat, it can immediately stop it.
 - **ESA/WSA** - The email security appliance (ESA) filters spam and suspicious emails. The web security appliance (WSA) filters known and suspicious internet malware sites.
 - **AAA Server** - This server contains a secure database of who is authorized to access and manage network devices. Network devices authenticate administrative users using this database.


Keep Backups

- Backing up device configurations and data is one of the most effective ways of protecting against data loss. Backups should be performed on a regular basis as identified in the security policy. Data backups are usually stored offsite to protect the backup media if anything happens to the main facility.
- The table shows backup considerations and their descriptions:

Consideration	Description
Frequency	<ul style="list-style-type: none">• Perform backups on a regular basis as identified in the security policy.• Full backups can be time-consuming, therefore perform monthly or weekly backups with frequent partial backups of changed files.
Storage	<ul style="list-style-type: none">• Always validate backups to ensure the integrity of the data and validate the file restoration procedures.
Security	<ul style="list-style-type: none">• Backups should be transported to an approved offsite storage location on a daily, weekly, or monthly rotation, as required by the security policy.
Validation	<ul style="list-style-type: none">• Backups should be protected using strong passwords. The password is required to restore the data.

Upgrade, Update, and Patch

- As new malware is released, enterprises need to keep current with the latest versions of antivirus software.
- The most effective way to mitigate a worm attack is to download security updates from the operating system vendor and patch all vulnerable systems.
- One solution to the management of critical security patches is to make sure all end systems automatically download updates.

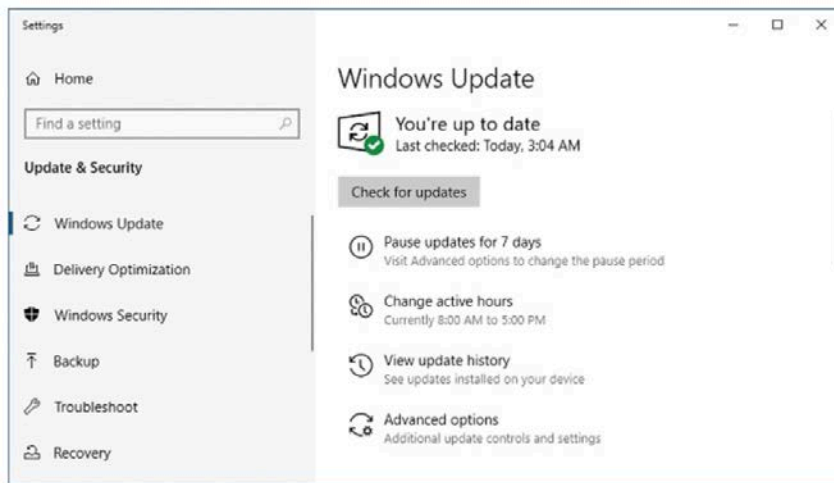

Authentication, Authorization, and Accounting

- **Authentication, Authorization, and Accounting** (AAA, or “triple A”) network security services provide the primary framework to set up access control on network devices.
- AAA is a way to control who is permitted to access a network (authenticate), what actions they perform while accessing the network (authorize), and making a record of what was done while they are there (accounting).
- The concept of AAA is similar to the use of a credit card. The credit card identifies who can use it, how much that user can spend, and keeps account of what items the user spent money on.

Authentication
Who are you?

Authorization
How much can you spend?




Accounting
What did you spend it on?

Reference Number	Sold	Posted	Activity Since Last Statement	Amount
43210987	01-03	01-13	Payment, Thank You	-\$74.25
01234567	01-12	01-13	Wings N' Things Anytown, USA	\$25.25
78901234	01-14	01-17	Record Release Anytown, USA	\$40.00
45678901	01-14	01-17	Sports Stadium Anytown, USA	\$75.25
3210987	01-22	01-23	Tie Tack Anytown, USA	\$20.75
76543210	01-29	01-30	Electronic World Anytown, USA	\$89.25
2345678		01-30	Transaction Fees	\$3.00
3456789		01-01	Annual Fee	\$25.00



Firewalls

- Network firewalls reside between two or more networks, control the traffic between them, and help prevent unauthorized access.
- A firewall could allow outside users controlled access to specific services.
- For example, servers accessible to outside users are usually located on a special network referred to as the **demilitarized zone (DMZ)**.
- The DMZ enables a network administrator to apply specific policies for hosts connected to that network.

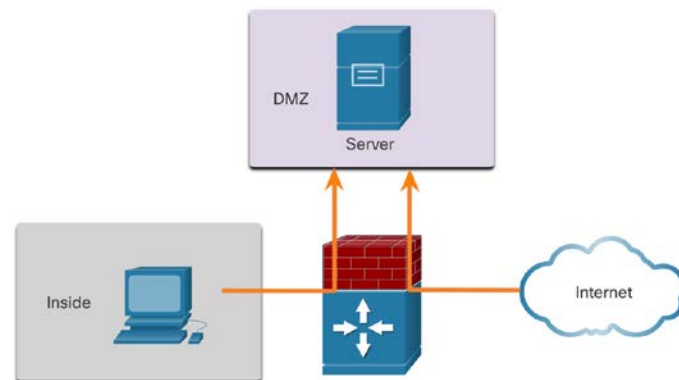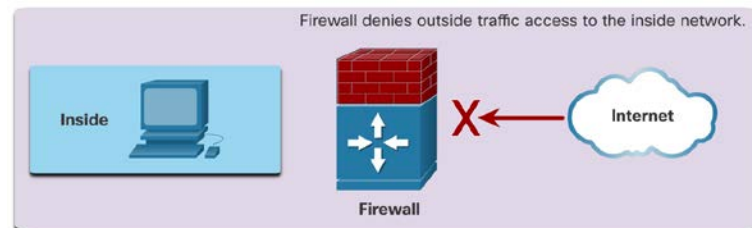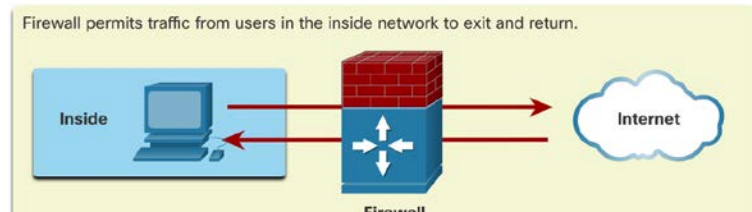

Types of Firewalls

- Firewall products come packaged in various forms. These products use different techniques for determining what will be permitted or denied access to a network. They include the following:
 - **Packet filtering** - Prevents or allows access based on IP or MAC addresses.
 - **Application filtering** - Prevents or allows access by specific application types based on port numbers.
 - **URL filtering** - Prevents or allows access to websites based on specific URLs or keywords.
 - **Stateful packet inspection (SPI)** - Incoming packets must be legitimate responses to requests from internal hosts. Unsolicited packets are blocked unless permitted specifically. SPI can also include the capability to recognize and filter out specific types of attacks, such as denial of service (DoS).

Endpoint Security

- An endpoint, or host, is an individual computer system or device that acts as a network client. Common endpoints are laptops, desktops, servers, smartphones, and tablets.
- Securing endpoint devices is one of the most challenging jobs of a network administrator because it involves human nature. A company must have well-documented policies in place and employees must be aware of these rules.
- Employees need to be trained on proper use of the network. Policies often include the use of antivirus software and host intrusion prevention. More comprehensive endpoint security solutions rely on network access control.



16.4 DEVICE SECURITY



Cisco AutoSecure

- The security settings are set to the default values when a new operating system is installed on a device. In most cases, this level of security is inadequate. For Cisco routers, the Cisco AutoSecure feature can be used to assist securing the system.

```
Router# auto secure
      --- AutoSecure Configuration ---

*** AutoSecure configuration enhances the security of
the router but it will not make router absolutely secure
from all security attacks ***

All the configuration done as part of AutoSecure will be
shown here. For more details of why and how this configuration
is useful, and any possible side effects, please refer to Cisco
documentation of AutoSecure.
At any prompt you may enter '?' for help.
Use ctrl-c to abort this session at any prompt.
```

Cisco AutoSecure

- In addition, there are some simple steps that should be taken that apply to most operating systems:
 - Default usernames and passwords should be changed immediately.
 - Access to system resources should be restricted to only the individuals that are authorized to use those resources.
 - Any unnecessary services and applications should be turned off and uninstalled when possible.
 - Often, devices shipped from the manufacturer have been sitting in a warehouse for a period of time and do not have the most up-to-date patches installed. It is important to update any software and install any security patches prior to implementation.

Passwords

- To protect network devices, it is important to use strong passwords. Here are standard guidelines to follow:
 - Use a password length of at least eight characters, preferably 10 or more characters.
 - Make passwords complex. Include a mix of uppercase and lowercase letters, numbers, and symbols.
 - Avoid passwords based on repetition, common dictionary words, letter or number sequences, usernames, relative or pet names, biographical information, such as birthdates, ID numbers, ancestor names, or other easily identifiable pieces of information.
 - Deliberately misspell a password. For example, Smith = Smyth = 5mYth or Security = 5 Secur1ty.

Passwords

- To protect network devices, it is important to use strong passwords. Here are standard guidelines to follow:
 - Change passwords often. If a password is unknowingly compromised, the window of opportunity for the threat actor to use the password is limited.
 - Do not write passwords down and leave them in obvious places such as on the desk or monitor.
- On Cisco routers, leading spaces are ignored for passwords, but spaces after the first character are not. Therefore, one method to create a strong password is to use the space bar and create a phrase made of many words. This is called a **passphrase**. A passphrase is often easier to remember than a simple password. It is also longer and harder to guess.

Additional Password Security

- There are several steps that can be taken to help ensure that passwords remain secret on a Cisco router and switch including these:
 - Encrypt all plaintext passwords with the **service password-encryption** command.
 - Set a minimum acceptable password length with the **security passwords min-length #** command.
 - Deter brute-force password guessing attacks with the **login block-for # attempts # within #** command.
 - Disable an inactive privileged EXEC mode access on console and vty ports after a specified amount of time with the **exec-timeout *minutes seconds*** command.

```

Router(config)# service password-encryption
Router(config)# security password min-length 8
Router(config)# login block-for 120 attempts 3 within 60
Router(config)# line vty 0 4
Router(config-line)# password cisco
Router(config-line)# exec-timeout 5 30
Router(config-line)# transport input ssh
Router(config-line)# end
Router#
Router# show running-config | section line vty
line vty 0 4
 password 7 03095A0F034F
 exec-timeout 5 30
 login
Router#
  
```

Enable SSH

- It is possible to configure a Cisco device to support SSH using the following steps:
 1. **Configure a unique device hostname** – A device must have a unique hostname other than the default.
 2. **Configure the IP domain name** – Configure the IP domain name of the network by using the `ip domain name word` global configuration mode command.
 3. **Generate a key to encrypt SSH traffic** – SSH encrypts traffic between source and destination.
 - A unique authentication key must be generated by using the `crypto key generate rsa modulus bits` global configuration command.
 - The modulus *bits* determines the size of the key and can be configured from 360 bits to 4096 bits.
 - The larger the bit value, the more secure the key but larger bit values also take longer to encrypt and decrypt information.
 - The minimum recommended modulus length is 1024 bits.

Enable SSH

- It is possible to configure a Cisco device to support SSH using the following steps:
 4. **Enable SSH version 2** – Version 1 of SSH may have some security issues so use the `ip ssh version 2` global configuration command.
 5. **Create a local database entry** – Create a local database username entry using the `username name privilege 15 secret password` global configuration command.
 6. **Enable vty inbound SSH sessions** – By default, no input session is allowed on vty lines. You can specify the input protocol SSH using the `transport input ssh` command.
 7. **Authenticate against the local database** – Use the `login local` line configuration command to authenticate the vty line against the local database.
- SSH (encrypted) is more secure than Telnet (plaintext).

Disable Unused Services

- Cisco routers and switches start with a list of active services that may or may not be required in your network. Disable any unused services to preserve system resources, such as CPU cycles and RAM, and prevent threat actors from exploiting these services.
- The type of services that are on by default will vary depending on the IOS version.
- For example, IOS-XE typically will have only HTTPS and DHCP ports open. You can verify this with the **show ip ports all** command.
- IOS versions prior to IOS-XE use the **show control-plane host open-ports** command.



16.5 MODULE PRACTICE AND QUIZ



What Did I Learn In This Module?

- After the threat actor gains access to the network, four types of threats may arise: information theft, data loss and manipulation, identity theft, and disruption of service.
- There are three primary vulnerabilities or weaknesses: technological, configuration, and security policy.
- The four classes of physical threats are: hardware, environmental, electrical, and maintenance.
- Malware is short for malicious software. It is code or software specifically designed to damage, disrupt, steal, or inflict “bad” or illegitimate action on data, hosts, or networks. Viruses, worms, and Trojan horses are types of malware.
- Network attacks can be classified into three major categories: reconnaissance, access, and denial of service.

What Did I Learn In This Module?

- To mitigate network attacks, you must first secure devices including routers, switches, servers, and hosts. Most organizations employ a defense-in-depth approach to security. This requires a combination of networking devices and services working together.
- Several security devices and services are implemented to protect an organization's users and assets against TCP/IP threats: VPN, ASA firewall, IPS, ESA/WSA, and AAA server.
- Infrastructure devices should have backups of configuration files and IOS images on an FTP or similar file server. If the computer or a router hardware fails, the data or configuration can be restored using the backup copy.
- The most effective way to mitigate a worm attack is to download security updates from the operating system vendor and patch all vulnerable systems. To manage critical security patches, to make sure all end systems automatically download updates.

What Did I Learn In This Module?

- AAA is a way to control who is permitted to access a network (authenticate), what they can do while they are there (authorize), and what actions they perform while accessing the network (accounting).
- Network firewalls reside between two or more networks, control the traffic between them, and help prevent unauthorized access.
- Securing endpoint devices is critical to network security. A company must have well-documented policies in place, which may include the use of antivirus software and host intrusion prevention. More comprehensive endpoint security solutions rely on network access control.
- For Cisco routers, the Cisco AutoSecure feature can be used to assist securing the system. For most OSs default usernames and passwords should be changed immediately, access to system resources should be restricted to only the individuals that are authorized to use those resources, and any unnecessary services and applications should be turned off and uninstalled when possible.

What Did I Learn In This Module?

- To protect network devices, it is important to use strong passwords. A passphrase is often easier to remember than a simple password. It is also longer and harder to guess.
- For routers and switches, encrypt all plaintext passwords, setting a minimum acceptable password length, deter brute-force password guessing attacks, and disable an inactive privileged EXEC mode access after a specified amount of time.
- Configure appropriate devices to support SSH, and disable unused services.

New Terms and Commands

- threat actor
- malware
- reconnaissance attacks
- access attacks
- defense-in-depth
- authentication, authorization, and accounting (AAA)
- demilitarized zone (DMZ)
- Cisco AutoSecure
- passphrase
- service password-encryption
- security passwords min-length
- login block-for
- exec-timeout
- crypto key generate rsa general-keys modulus
- username password | secret
- login local
- transport input ssh
- show ip ports all
- show control-plan host open-ports

